
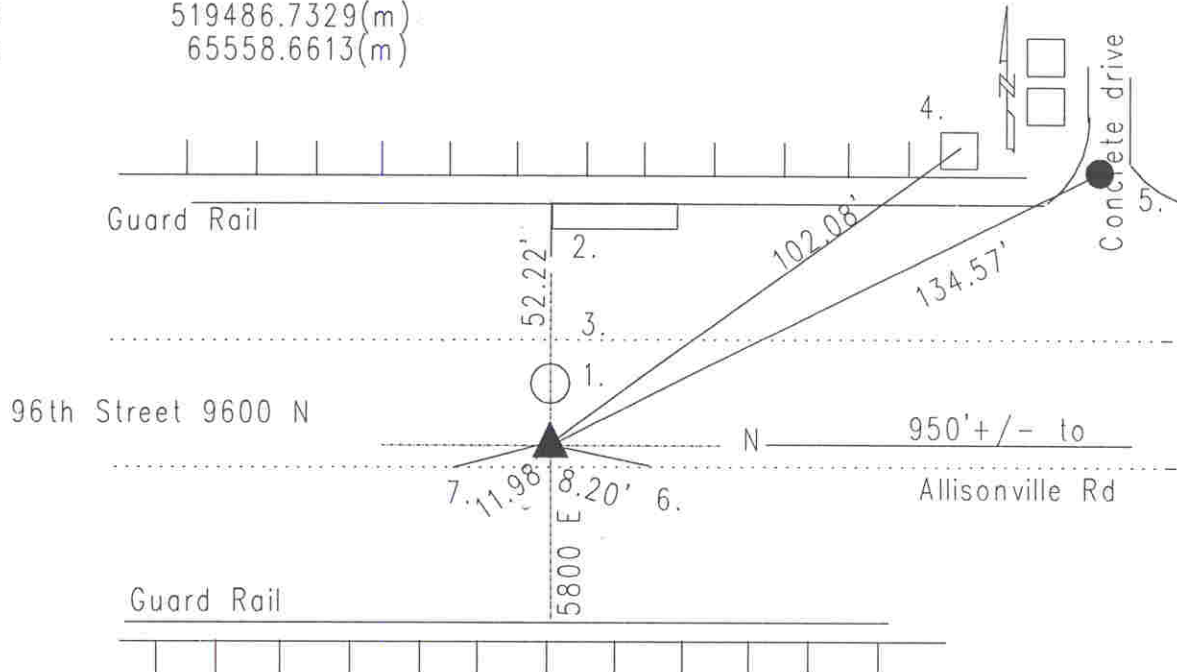


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 15 TOWNSHIP 17 RANGE 4
DATE: 8-11-01
PARTY CHIEF: Whiteside
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-17-96

IN. S.P.C. E ZONE NAD '83
NAME: 17041501
N: 519486.7329(m)
E: 65558.6613(m)

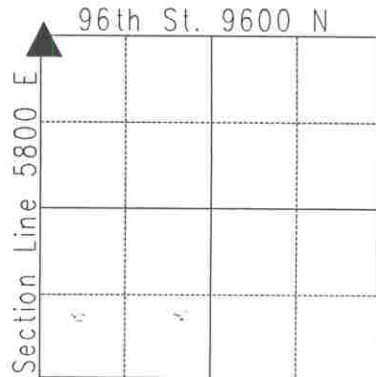

Original post set 1821 by Laughlin with witnesses: 12" beech S 40 E 23 links;
12" dogwood S 31 W 14 links per Marion County Atlas pg. 12. Hosbrook
8-26-1852 called stone set with witness: 10" beech N 41 3/4 E 53 links;
30" oak S 43 N 133 links. McCommock 4-30-57 called iron pipe. 10-10-70
SeFranka called the same. 4-21-76 Wilcoxon called the same. Hiselman
8-18-76 called the same. 7-10-80 Cleveland called the same. Wilcoxon
3-8-85 called the same. Kiste 8-20-91 set Harrison in place of iron pipe.
Replaced due to construction on 96th Street (7-17-96) Re-tied 8-11-01
by Whiteside.

17041501

REF.	DISTANCE	DESCRIPTION
1.	4.71'	Due N to C/L mounment
2.	52.22'	Due N to SW corner of drop inlet
3.	15.39'	Mag nail w/brass washer in expansion joint
4.	102.08'	Mag nail w/washer top of wooden guard post
5.	134.57'	Survey marker nail
6.	8.20'	Mag nail w/brass washer in expansion joint of curb
7.	11.98'	Mag nail w/brass washer in expansion joint of curb